



Compact
photo printer

P525L



Expand Business with Versatility

- New photo paper formula without toluene, high quality, low ownership cost
- Ideal for photo booth, photo kiosk, and on-location event photography
- Optional WiFi dongle uses phone link Prinbiz APP for print.
- Optional WiFi dongle uses the laptop to wireless transmission print.
- Stand-by time power 8W
- Easily identify the amount consumed by media with LCD.



Support
Wireless Printing



Support Memory
Card Printing



Laptops



Tablets/iPads®



Smartphones/
iPhones®

Specifications

Model Name	P525L	
Print Method	Dye Sublimation	
Resolution	300dpi (Dye sub 300dpi) ≙ Inkjet printing 4800dpi)	
Printable Size & Corresponding Print Kit	1.33x6" (34x152 mm) 2x6" (51x152 mm) 4x6" (102x152 mm)	4x6" (102x152 mm) Print Kit
	3.5x5" (89x127 mm) 5x5" (127x127 mm) 5x7" (127x178 mm)	5x7" (127x178 mm) Print Kit
	4x6" (102x152 mm) 5x6" (127x152 mm) 6x6" (152x152 mm) 6x8" (152x203 mm)	6x8" (152x203 mm) Print Kit
	1.33x3" (34x76 mm) 2x3" (51x76 mm) 3x4" (76x102 mm)	4x6" (102x152 mm) Perforated Print Kit
	3x4" (76x102 mm) 3x5" (76x127 mm) 3x6" (76x152 mm) 3x8" (76x203 mm)	6x8" (152x203 mm) Perforated Print Kit
	4x6" (102x152 mm) : 500 prints (2 rolls/ctn) 5x7" (127x177 mm) : 290 prints (2 rolls/ctn) 6x8" (152x203 mm) : 250 prints (2 rolls/ctn)	
	Prints Per Roll	
	Print Speed	4x6" (12.8 sec) 5x7" (18.5 sec) 6x8" (20.5 sec)
	Surface Finishing	Glossy (Default), Matte
	Display	LCM with multi-language supported
	Operation System	Windows 7 or above, macOS v.10.6 or above
	Way to Print	PC link, WiFi, Memory card, NFC
Support APP	Prinbiz App*	
App Support File Formats	Baseline JPEG	
Interface	USB 2.0	
Power	AC100-240V, 50-60Hz	
Dimension (WxHxD)	12.87x11.81x14.1 inch / 327x300x359 mm	
Weight	Approx. 18kg / 39.65lbs (Consumables excluded)	
Certification	FCC, CE, CCC, NCC, cTUVus	
Optional Accessories	Wireless USB dongle***, Output paper tray	

Specifications are subject to change without prior notice.

* Prinbiz APP downloadable from App Store & Google Play.

** Wireless USB dongle required (wireless printing supports Ad-hoc mode only).

Dimension



Service & Support Centers

Taiwan (Headquarters)

HiTi Digital, Inc.
9F., No.213, Sec. 3, Beixin Rd., Xindian Dist.,
New Taipei City 231, Taiwan (R.O.C.)
TEL: +886-2-2912-6268
FAX: +886-2-2912-6118
www.hiti.com

China

HiTi Digital Suzhou, Inc.
Room 1914, No. 381, Suzhou Ave. East,
Suzhou Industrial Park, Suzhou City,
Jiangsu Province China.
TEL: +86-512-82281688-2195
FAX: +86-512-82281690

North America

HiTi Digital America, Inc.
20803 E Valley Blvd, Suite 110 Walnut, CA 91789, U.S.A.
TEL: +1-844-319-0099, +1-909-594-0099
FAX: +1-909-598-0011

Latin America

HiTi Digital, México Inc.
TEL: +52 (55) 7587-4057, +52 (55) 7587-4058,
+52 (55) 7587-4059, +52 (55) 7587-4060
FAX: +1-925-2622375

Flexible Connection

1. Wireless Printing

Directly data transferring: Download the "Prinbiz" APP for use with iOS and Android firstly, and send photos from hand-held devices to print.




Install the driver on a laptop with a wireless network card to wireless printing.



2. Memory Card Printing

Memory card browsing: Get prepared a carder reader which is capable of USB A-type slot for "Prinbiz WiFi dongle", after a few simple setup processes, users are able to browse the photos in memory card via hand-held devices to print.

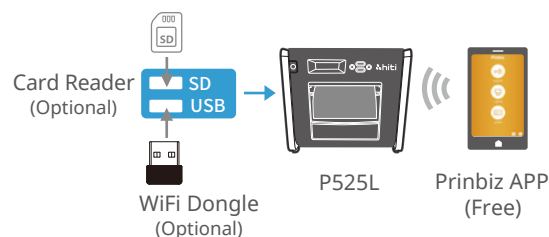

3. Smart Editing APP



Prinbiz APP



Europe

HiTi Digital Europe S.r.l
Via Walter Marcobi 4, 21100 Varese, Italy
TEL: +39 332 176 5314 / 332 176 5312 (Technical Support)
FAX: +39 332 176 5315

Singapore

HiTi Digital Singapore Pte Ltd
5008 Ang Mo Kio Ave 5 #04-09 Techplace II Singapore 569874
TEL: +65-6475-1885 / FAX: +65-6475-2281



Copyright ©2021 HiTi Digital, Inc. All Rights Reserved.
iPhone, iPad, macOS and App Store are trademarks of Apple Inc.
iOS is a trademark of Cisco. Android and Google Play are trademarks of Google Inc.
All other trade names and trademarks are properties of their respective owners.